
Completed Projects (FY 23/24)						Village of Ceresco		
Project #	Street Name	Start	End	Description of Work	Length (mi)	Fir	al Cost	
M-196-(71)	City Wide			Street Patching	Varies	\$	15,000	

One Year Plan - Fiscal Year 2024/2025 Projects (October 1st to September 30th)					Village of Ceresco		
Project #	Street Name	Start	End	Description of Work	Length (mi)	Est. Cost	
M-196-(73)	City Wide			Street Patching	Varies	\$ 25,000	
M-196-(72A)	4th Street	Main Street	Park Street	Concrete Paving, Curb/Gutter, Storm Sewer, Utilities, Grading and Erosion Control	0.24		
	Park Street	110'West of Hunter Drive	100' West of 4th Street		0.09	\$40,000 Rest by Developer	
	Edwin Street	4th Street	100' West of 4th Street		0.02		
M-196-(72B)	Main Street	350' West of 3rd Street	100' West of 4th Street	Add Curb and Gutter with Sidewalk	0.1	By Developer	

Six Year Plan - Fiscal Year 2024/2025 to 2029/2030 Projects (October 1st to September 30th)						Village of Ceresco		
Project #	Street Name	Start	End	Description of Work	Length (mi)	Est. Cost		
M-196-(53)	Cameron Street	2nd Street	Archie Street	Remove and replace street with new concrete address storm drainage (ditch clean out - curb/storm sewer).	0.10	\$ 350,000		
M-196-(65)	3rd Street	Beech Street	Elm Street	Mill and overlay existing roadway (22' wide, 3" overlay) with	0.08	\$ 75,000		
	Elm Street	3rd Street Intersection		patching. Elm intersection reconstruction with concrete.				
M-196-(62)	3rd Street	Spruce Str.	Beech Street	Mill and overlay existing roadway (22' wide, 3" overlay). Add full height curb outside of parking and drive-over curb adjacent to the parking lot. Relocate sidewalk crossing also.	0.08	\$ 70,000		
M-196-(66)	Elm Street	3rd Street	4th Street	Mill and overlay existing roadway (22' wide, 3" overlay) with patching as needed	0.08	\$ 45,000		
M-196-(51)	2nd Street	Pine Street	Beech Street	Remove and replace street and parking with new concrete, update sidewalks and address storm drainage. Coordinate with Village utility improvements also needed in this area. (not included in estimate)	0.14	\$ 700,000		

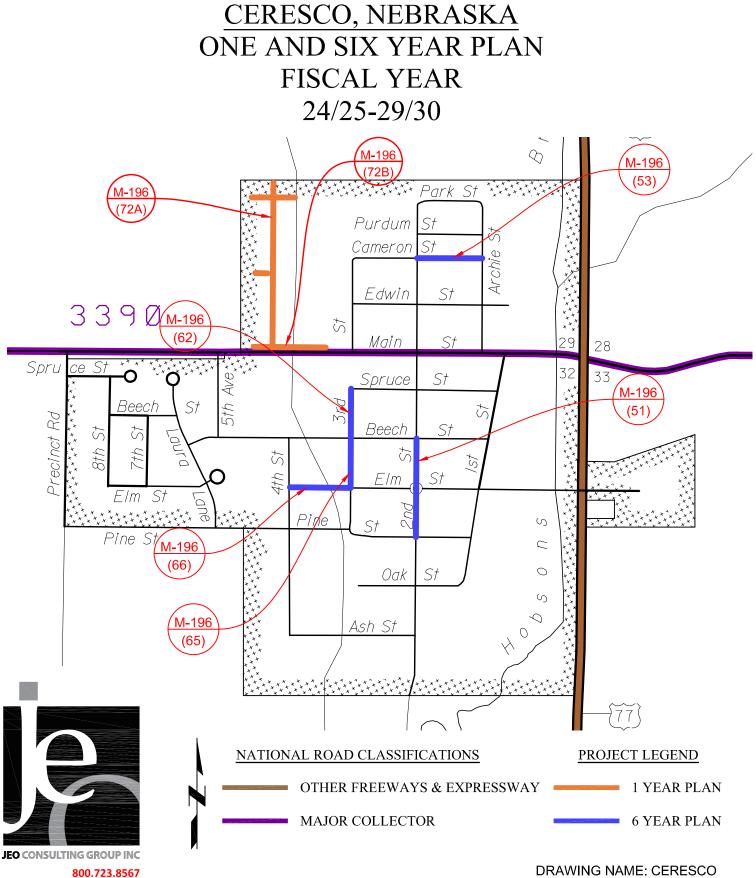

REVISED BY: SMD REVISED ON: JULY 24, 2024